

PURPOSE-BUILT MINING EQUIPMENT



GETMAN MECHANICAL SCALERS are a key component of maintaining safe and productive working environments in underground operations, performing the necessary task of scaling safely and effectively through a purpose-built design philosophy. Mechanical scaling is the safest way to bring down loose material from back and rib surfaces.

Getman's ProScale 24 mechanical scaler has an optimal roof scaling coverage range of 3m to 8m (9.8ft to 26.2ft), and an optimal rib scaling coverage range from 0m to 8m (0 ft to 26.2 ft). The single extension boom allows an advance of up to 4m (13.1 ft) from a single setup.

ProScale 24 scalers drive safety through purpose-built design, including an operator compartment removed from the scaling area at the far rear of the machine and a stable chassis that does not require stabilizers, making emergency maneuvers a single step operation. The optimized line of sight to the scaling area improves visibility and operational effectiveness, while the cabin is rubber-mounted onto the chassis with rubber isolators to reduce vibration transfer to the operator.



TECHNICAL SPECIFICATIONS

ENGINE

- Stage V/ T4F Approved Cummins B 4.5 - 129kW (173 hp)
- Tier III approved engine (4 cylinder)
 - › Cummins QSB4.5, 127kW (170hp)
- Liquid-cooled, turbocharged
- 151 L (60 gal) fuel tank with self-closing cap, sight gauges, and fuel/water separator

EXHAUST SYSTEM

- Exhaust after treatment

TRANSMISSION

- Dana Clark powershift transmission
- Three speeds forward and reverse
- 4-wheel drive

AXLES

- Kessler S72 planetary drive axle package

TIRES

- 12.00x20 mine service tires

BRAKE SYSTEM

- Service brakes are spring-applied, hydraulic-released, liquid-cooled multi-disc brakes on all wheels.
- Automatic brake application (ABA) occurs upon fire suppression activation or loss of hydraulic accumulator pressure, transmission pressure or electrical power
- Hydraulic port for park brake emergency tow release

STEERING

- Armrest mounted joystick steering with integrated horn
- Heavy-duty, tapered roller bearing joint
- Two double-acting steer cylinders

HYDRAULIC SYSTEM

- Sensors and diagnostic test ports with quick couple fittings for: each axle, park brake release pressure, hydraulic pumps
- 10-micron return filter
- 132 L (80 gal) hydraulic reservoir
- High pressure hydraulic filters w/ bypass warning alarm
- Hydraulic oil cooler w/ secondary filtration package

OPERATOR COMPARTMENT

- Three-point contact for entry and exit
- ROPS/FOPS certified compartment
 - › Open canopy
 - › Enclosed cabin with heater and air conditioner
- Forward and side facing swivel operator seat
- Extreme-duty, fully adjustable operator suspension seat with built-in joystick mounts, bolt-on headrest and seat belt
- Joystick controlled steering, transmission, scaling/tram function selection, and all boom scaling functions
- Reverse camera

INSTRUMENTATION

- Vehicle performance monitoring with on-screen gauges and diagnostics
- 10" touch screen display
- Engine coolant temperature
- Engine oil pressure
- Voltmeter
- Hour meter
- Tachometer
- Transmission clutch pressure
- Converter temperature
- Brake accumulator pressure
- Brake accumulator low-pressure warning
- Park brake applied indicator
- Audio/visual alert for high engine temperature
- Audio/visual alert for low engine oil pressure

ELECTRICAL SYSTEM

- 24 V electrical system
- Lockable master switch (isolator)
- Maintenance-free batteries
- LED lighting package (IP69K rated)
- Sealed connectors
- Braided outer jacket harness protection

OTHER GENERAL EQUIPMENT

- Variable audio backup alarm (87-112dBA)
- Handheld fire extinguisher(s)
- Wheel chocks
- Manual actuated Ansul LVS FSS tied to engine shutdown
- Central lubrication system

OPTIONAL EQUIPMENT

- Spare tire
- Wiggins fill system
- Lincoln auto-lubrication package
- Ansul Checkfire automatic actuation fire suppression system with linear detection loop
- Door and/or seat belt interlocks
- 4-point seatbelt harness
- 4-wheel independent brake temp monitors
- INTELLiight - Adjustable color temp and brightness

MECHANICAL SCALING SYSTEM

SCALER SETUP

- 6.7 m (22 ft) minimum recommended drift width for optimal scaling
- 7.3 m (24 ft) high-strength, reinforced telescopic boom
- Maximum boom height reach of 10.1 m (33 ft 3 in) with 5.5 m to 7.9 m (18 ft to 26 ft) working height
- Scaling tool operated by a dual-acting hydraulic cylinder, and internal gear rotator providing 180° of rotation
 - › Pick with replaceable tooth
- 2750 mm (108 in) wide stance front tires
- Oscillating cradle lock-out, automatically activated with scaling brake

- Pick with replaceable tooth



ADDITIONAL OPTIONS

- Front push blade, 2743 mm (108 in) wide (See P.4 image)
- Hydraulic hammer with up to 678 N-m (500 ft-lb) force
- Rotary Cutter - Soft Rock Only




Hydraulic hammer




Rotary Cutter - Soft Rock Only

DESIGN FEATURES AND LAYOUT

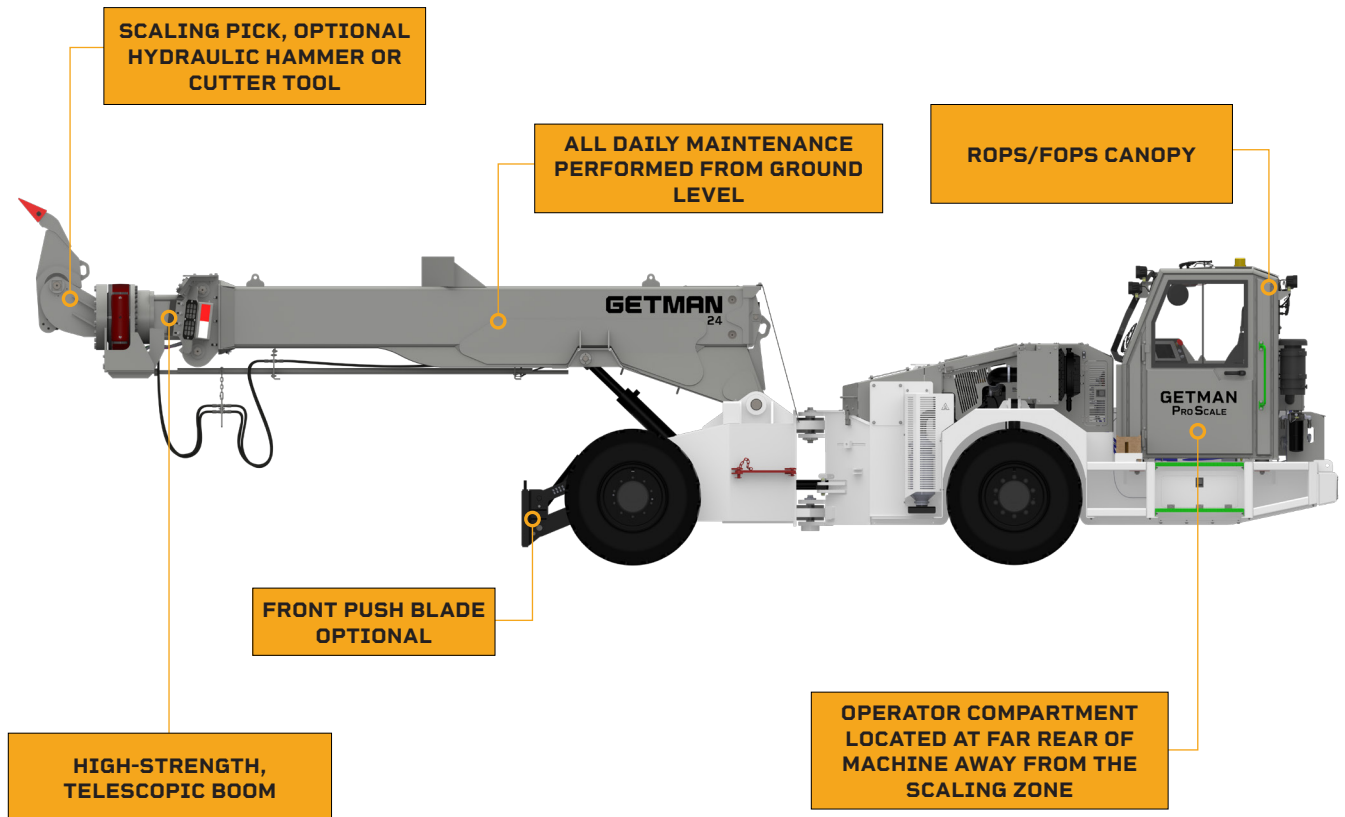

PROSCALE 24 DIMENSIONS AND REACH

TURNING RADIUS	4832 mm	134 in
MACHINE WIDTH	2743 mm	90 in
HEADING WIDTH	4931 mm	140 in
ARTICULATION ANGLE	+/- 30 DEGREES	

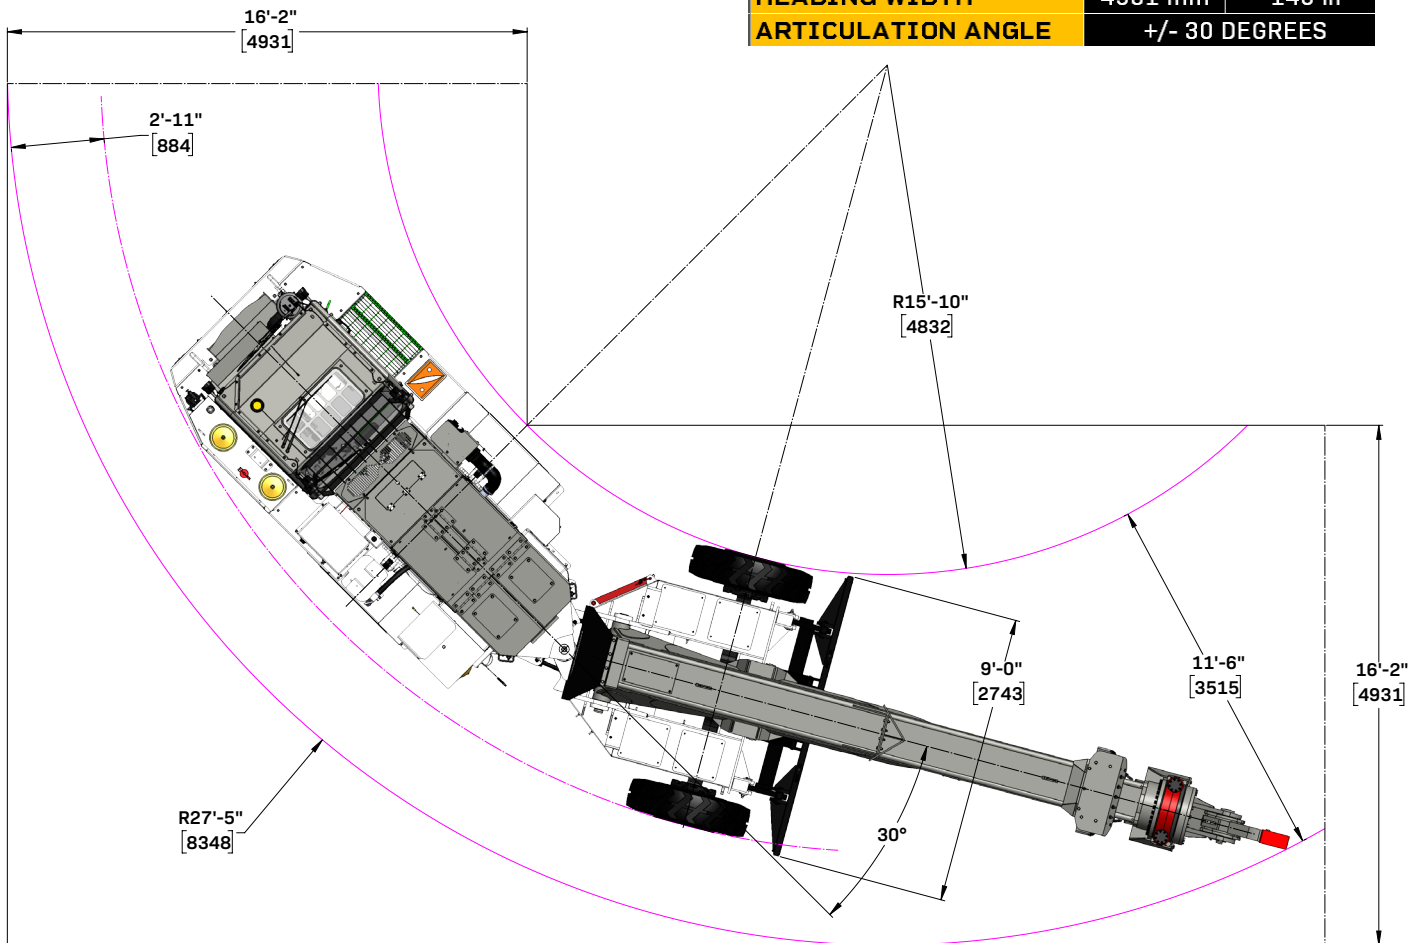



ABOUT GETMAN CORPORATION

Getman Corporation is a global supplier of mobile equipment to the mining industry, offering customer-specific solutions to underground mines in the production and production support classes of equipment. All Getman equipment is designed with extensive research and development and is supported by over seventy years of experience in serving the underground mining industry.

Through our network of distributors we sell and support our products on six continents, offering exceptional product solutions and following up with world class aftermarket support. At Getman Corporation, designing and building vehicles for the underground mining industry is what we do. We take pride in being the preferred supplier of underground production and

production support equipment to miners globally by offering customer-specific, value-driven and long-lasting solutions. For more information contact your Getman distributor or email us at info@getman.com, or visit our website at getman.com.

For parts or service support, email us at parts@getman.com or service@getman.com.

Getman Corporation assembled this datasheet with the intention of passing along the most accurate information possible, however this document shall not be binding in any way and shall be considered informational only. All values stated herein are theoretical in nature. All orders are accepted based on the terms and conditions set forth in the individual purchase or sales agreement. Getman reserves the right to make changes to the specification herein at any time and without further notification.

Pictured machines in this document may contain optional and additional equipment.

GETMAN

GETMAN CORPORATION
59750 34th Avenue
Bangor, MI 49013 USA

Tel +1 (269) 427-5611
info@getman.com
getman.com